

ROOF COATING REGULAR

Watertight roof protection



PRODUCT DATA SHEET



Product description

A waterproof coating, extra reinforced with microfibres and solvent-free, for the seamless repair and renovation of old and damaged bitumen roofs and gutters. After drying, it forms a highly adhesive and slightly elastic coating that seals all pores and micro-cracks and protects against airborne pollution and temperature fluctuations. The life span of bitumen roofs is thus extended by at least 3 years.

Application

For use on all types of bitumen roofing. It can also be used on wood, masonry, cement rendering and concrete to waterproof terraces, buried walls and foundations. It can be applied to slightly damp substrates, but this will slow the drying process.

Advantages

- › Extends the lifespan
- › Does not contain solvents
- › Repairs, renews and maintains
- › Watertight roof protection

How much product do I need?

Use about 0.5 litres per m² for each coat.

See also the calculator on our website www.aquaplan.com.

Handy tips?

- You can clean your tools with water immediately after use.
- Eco Formula: **ROOF COATING REGULAR** does not contain any harmful solvents. By using this product, you are contributing to an eco-friendly environment
- Store **ROOF COATING REGULAR** in a cool (max. 20°C) and frost-free place.
- Do not apply **ROOF COATING REGULAR** if the ambient or substrate temperature is below +5°C or above +50°C.

Material	Colour	Contents	Coverage	Drying time	Coats	Overpaintable
High-tech bitumen emulsion	Black	1 / 4,8 / 12 Kg	Approx. 1 m ² /Kg	About 4 hrs	2	No

ROOF COATING REGULAR

Watertight roof protection



INSTRUCTIONS



What do I need?




How do I prepare the surface?

- First remove all dust and grease from the substrate.
- Repair blisters, cracks and tears with **ROOF REPAIR REGULAR** or the elastic **ROOF SEAL MASTIC SBS**. If necessary, reinforce with **ANTI-CRACK**, a tear-resistant polyester fleece. Allow to dry sufficiently (about 1 week) before proceeding
- Clean the substrate and impregnate it with quick-drying **ROOF PRIMER ROOFING** bitumen bonding varnish to ensure optimum adhesion.



How do I use the product?

- Apply two cross coats of **ROOF COATING REGULAR** with a brush or roller. Use about 0.5 kg/m²/coat and ensure that each coat is protected from rain, frost and mist for at least 4 hours. The initial brown colour becomes completely black.
- Apply the second coat only after the first coat has fully cured. This takes 24 to 36 hours. Slate granules can be sprinkled into the last wet coat for additional UV protection.

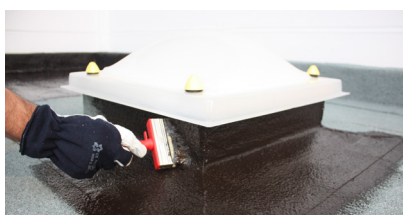

Usage	Drying time	Cleaning
1 kg ± 1 m ²	4 hrs 24-36 hrs	H ₂ O

Would you like more information?

We are ready to answer all your questions.

Feel free to contact us:

Belgium: 03 248 30 00 or info@aquaplan.com

The Netherlands: 0162 42 29 00 or verkoop-dhz@martensgroep.eu

Website: www.aquaplan.com

