

RAIN PROTECT EXTREME

Waterproof wall coating



PRODUCT DATA SHEET



Product description

A grey, ready-to-use wall coating that blocks moisture penetration and protects the wall from moisture infiltration. After curing, it forms a waterproof coating. Its unique composition renews water-damaged walls and strengthens their structure. The high-tech composition guarantees waterproofing on all dry and damp exterior walls in a single coat. The coating is easy to apply, has good coverage and dries quickly. The coating is long-lasting, dirt-repellent and washable.

Application

For use on painted and unpainted exterior walls made of brick, cement render, masonry, fibre cement, concrete, plaster, etc. Ideal for garage walls, as an alternative to bluestone façade skirting, for walls in contact with soil, detached walls around a structure, low garden walls, concrete posts, etc.

Advantages

- ▶ Watertight in 1 coat
- ▶ Dirt-repellent and washable
- ▶ Adheres to damp substrates
- ▶ Protects walls against moisture infiltration

How much product do I need?

Use 1 litre for 1 m²

Handy tips?

- **RAIN PROTECT EXTREME** is made from selected acrylic resins and solvents.
- Store **RAIN PROTECT EXTREME** in a cool (max. 20°C) and frost-free place.
- Do not apply if the ambient or substrate temperature is below +5°C or above +35°C.
- Stir well before use and close the container carefully after use.
- Clean your tools with white spirit or turpentine.

Material	Colour	Contents	Coverage	Drying time	Coats	Overpaintable
Acrylic	Grey	0,75 L / 4 L	About 1 L/m ²	About 3 hrs	1	Yes

RAIN PROTECT EXTREME

Waterproof wall coating



INSTRUCTIONS



What do I need?




How do I prepare the surface?

- Remove all dust and grease from the substrate. If the substrate is very dirty, clean it with a pressure washer. Remove any loose components.
- Treat any green mould, lichens and algae with **GARDEN CLEAN GREEN REMOVER**.
- Seal cracks and weathered joints with **WALL PROTECT QUICK JOINT** or an acrylic mastic - overpaintable.
- The substrate can be slightly damp.

How do I use the product?

- Stir the **RAIN PROTECT EXTREME** well before use.
- Apply one coat of **RAIN PROTECT EXTREME** with a brush or roller. Use 0.75 to 1 l/m². Work from top to bottom.

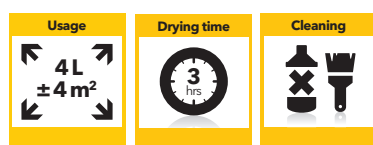

Would you like more information?

We are ready to answer all your questions.

Feel free to contact us:

Belgium: 03 248 30 00 or info@aquaplan.com

The Netherlands: 0162 42 29 00 or verkoop-dhz@martensgroep.eu

Website: www.aquaplan.com

