

WALL PROTECT SEALER

Moisture-resistant interior wall



PRODUCT DATA SHEET

Product description

Breathable and transparent coating for the effective treatment of above-ground damp interior walls prior to painting or wallpapering. When dry, it forms a colourless and waterproof film against moisture penetration. This prevents moisture stains, mould, peeling wallpaper and flaking paint. Due to its special formulation, it penetrates deep into the pores and can be applied to both dry and wet substrates.



Application

For use on most interior walls, including plaster, stone, concrete, etc.

Advantages

- › Lasting result
- › Also adheres to damp surfaces
- › Apply before painting or wallpapering
- › Environmentally friendly, odourless, vapour permeable

How much product do I need?

Use approx. 1 litre per 4 m² per coat.

See also the calculator on our website www.aquaplan.com.

Handy tips?

- Store in a cool (max. 20°C) and frost-free place.
- Do not apply if the ambient or substrate temperature is below +5°C.
- Stir well before use and close the container carefully after use.
- Clean your equipment with water immediately after application.

| Material | Colour | Contents | Coverage | Drying time | Coats | Overpaintable |
|------------------|--------|----------------|--|---------------|-------|---------------|
| Acrylic polymers | White | 0,75 l / 2,5 l | Approx. 0.25 l/m ² per coat | About 3 hours | 2 | Yes |

WALL PROTECT SEALER

Moisture-resistant interior wall



INSTRUCTIONS



What do I need?




How do I prepare the surface?

- Remove all dust and grease from the substrate.
- Remove old layers of paint and/or wallpaper.



How do I use the product?

- Apply at least 2 coats of **WALL PROTECT SEALER** with a brush or roller at a rate of 0.25 - 0.30 litre/m² per coat with an interval of about 3 hours. Can be applied to slightly damp substrates. Excessively damp or saturated walls must be dried first.
- Apply a third coat on highly absorbent substrates and/or problem areas.
- After about 24 hours, finish the interior wall with wallpaper, water-based or solvent-based paint.

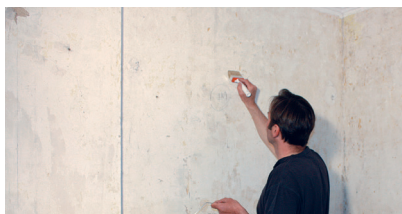

| Usage | Drying time | Cleaning |
|-----------------------------|-------------|------------------|
| 2,5 L ± 5 m ² | 24 hrs | H ₂ O |

Would you like more information?

We are ready to answer all your questions.

Feel free to contact us:

Belgium: 03 248 30 00 or info@aquaplan.com

The Netherlands: 0162 42 29 00 or verkoop-dhz@martensgroep.eu

Website: www.aquaplan.com

