


FLASHING PROFILE

For roof details on bitumen roofs



PRODUCT DATA SHEET

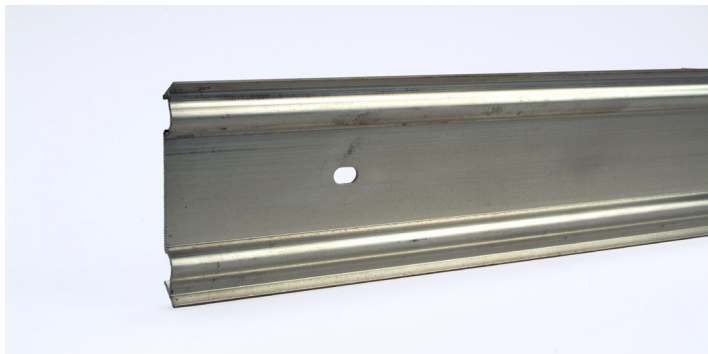

Product description

Aesthetic aluminium wall profile for a perfect watertight finish between the roof covering and the wall. Prevents water ingress between the wall and the roof covering. Replaces traditional zinc or lead flashings.

Application

For bonding roof membranes to a wall on flat roofs.

Advantages

- ▶ Watertight finish between roof covering and walls
- ▶ Aesthetic
- ▶ Easy to install

How much product do I need?

- A profile is 2 m long and 60 mm wide.

Handy tips?

- Seal the flashing profile with Roof Seal Mastic at temperatures above 5°C.

Material	Colour	Contents	Coverage	Drying time	Coats	Overpaintable
Aluminium	Aluminium	1 profile = 2 m by 60 mm	Per linear metre	Roof Seal Mastic 24 hrs	1	No

FLASHING PROFILE

For roof details on bitumen roofs



INSTRUCTIONS



What do I need?



How do I prepare the surface?

- Where the roof meets a wall, run the roof covering over the mastic edge as much as 10 cm up the wall.
- Drill holes in the wall that correspond to the holes in the profile.

How do I use the product?

- For a watertight finish, the **FLASHING PROFILE** is attached with Aquaplan nail plugs.
- Then seal the top with **ROOF SEAL MASTIC** or **ROOF GLUE EPDM**.

Would you like more information?

We are ready to answer all your questions.

Feel free to contact us:

Belgium: 03 248 30 00 or info@aquaplan.com

The Netherlands: 0162 42 29 00 or verkoop-dhz@martensgroep.eu

Website: www.aquaplan.com

