

FOUNDATION PROTECT EXPERT

Waterproof protection for all underground materials



PRODUCT DATA SHEET



Product description

Universal, elastic, solvent-free bitumen emulsion for waterproofing on the outside of all materials in contact with soil or below ground level.

After curing, it forms a tough, elastic, seamless, moisture-resistant coating that seals all pores and microcracks. Due to its high resistance to the aggressive influences of groundwater (humus, saline solutions, dilute organic acids and alkalis),

FOUNDATION PROTECT EXPERT is the ideal protection for all materials that come into contact with groundwater. It can also be applied to slightly damp substrates.

Application

For use on all types of concrete and masonry foundations, such as slabs (e.g. garden sheds, etc.), convector shafts, septic tanks, reservoirs, sewage pipes or materials in wood or metal such as garden posts, cisterns, drainpipes, etc.

Advantages

- › Solvent-free
- › Adheres to any substrate
- › Even on slightly damp substrates
- › Environmentally friendly and safe to use

How much product do I need?

Use approx. 1 kg per m² per coat.

See also the calculator on our website www.aquaplan.com.

Handy tips?

- Store in a cool (max. 20°C) and frost-free place.
- Do not apply if the ambient or substrate temperature is below +5°C or if rain is expected during the curing process.
- Stir well before use and close the container carefully after use.
- Clean your tools with water immediately after application. After drying, use white spirit or turpentine.

Material	Colour	Contents	Coverage	Drying time	Coats	Overpaintable
Bitumen emulsion	Black	4 KG	Approx. 1 m ² /kg per coat	About 24 hours	2	No

FOUNDATION PROTECT EXPERT


Waterproof protection for all underground materials



INSTRUCTIONS




What do I need?

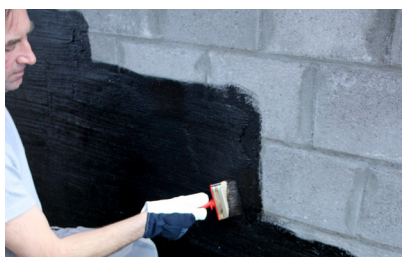

How do I prepare the surface?

- Ensure the surface is sound and free of loose particles.
- First remove all dust and grease from the substrate.
- Lightly moisten the surface with water.

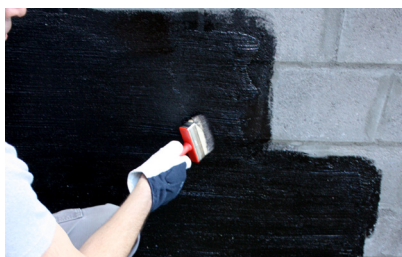

How do I use the product?

- Apply a first coat of **FOUNDATION PROTECT EXPERT** diluted with approx. 10% water with a brush or roller at a rate of approx. 1 kg/m². Ensure that each coat is protected from rain for at least 4 hours.
- After the first coat has fully cured, apply a second, undiluted coat of **FOUNDATION PROTECT EXPERT** with a brush or roller at a rate of approx. 1 kg/m²/coat. Curing takes about 24 hours. Depending on the porosity of the substrate and the desired degree of protection, a third, undiluted coat can be applied.



Usage	Drying time	Cleaning
4 kg ± 2 m ²	24 hrs	H ₂ O

Would you like more information?

We are ready to answer all your questions.

Feel free to contact us:

Belgium: 03 248 30 00 or info@aquaplan.com

The Netherlands: 0162 42 29 00 or verkoop-dhz@martensgroep.eu

Website: www.aquaplan.com

