

ROOF PAINT

Water-repellent roof protection



PRODUCT DATA SHEET



Product description

A durable, water-repellent and aesthetic protective layer for treating slate, tile and corrugated sheet roofs affected by algae and mosses. When dry, it forms a vapour-permeable and self-cleaning layer that protects the roof from damp, temperature fluctuations and the damaging effects of UV rays. **ROOF PAINT** does not contain any harmful solvents. This makes it safe to use and environmentally friendly.

Application

For use on all porous fibrocement slates, tiles, shingles and bituminous corrugated sheets.

Advantages

- › Prevents moss formation
- › Extends the life of your existing roof covering
- › Renews slates, tiles, shingles and corrugated sheets
- › Contains no solvents = better for the environment
- › Allows water vapour to pass through

How much product do I need?

Between 0.12 and 0.17 l/m² per coat

Handy tips?

- **ROOF PAINT** is made of high-quality acrylic resins and pale pigments.
- Store in a cool (max. 20°C) and frost-free place.
- Do not apply if the ambient or substrate temperature is below +5°C or above +50°C, or if rain is expected within the first 2 hours.
- Ecological formula: **ROOF PAINT** does not contain any harmful solvents.
- **ROOF PAINT** has a matt appearance.
- **ROOF PAINT** can also be applied with a spray gun with the following characteristics: airless / pressure 220 bar / "turn-flow" nozzle opening 18-40" / filter 50 mesh. Allow to dry between coats for 2 to 4 hours depending on the temperature and amount of humidity.
- Clean your tools with water immediately after use.

Material	Colour	Contents	Coverage	Drying time	Coats	Overpaintable
High-quality acrylic resin	Charcoal	5 L / 10 L / 15 L	Approx. 6 - 8 m ² /l/ coat	About 2 - 4 hours depending on the temperature and humidity	2	Yes

ROOF PAINT

Water-repellent roof protection



INSTRUCTIONS



What do I need?




How do I prepare the surface?

- First remove all dust and grease from the substrate. A slightly damp substrate will improve adhesion.
- Thoroughly remove all green deposits and algae with a putty knife or pressure washer (min. 150 bar) until no more fibres come loose. This will eliminate the need for an adhesive layer.
- Apply **GARDEN CLEAN GREEN REMOVER** to destroy any remaining spores. Leave to soak in for 24 hours.
- Rinse to remove any remaining residue.



How do I use the product?

- Stir the product well.
- Apply a first coat of **ROOF PAINT** diluted with 10 - 15% water with a brush or roller at a rate of approx. 0.12 - 0.17 litre/m² per coat. Allow to dry for 4 hours.
- Then apply a second, undiluted coat. Avoid putting it on too thickly. Make sure that the cut lines are not blocked to ensure perfect water drainage. A second undiluted coat is only necessary on severely degraded substrates.

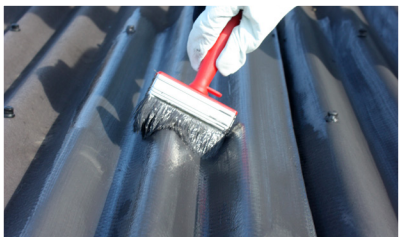

Usage	Drying time	Cleaning
10 L ±40 m ²	4 hrs	H ₂ O

Would you like more information?

We are ready to answer all your questions.

Feel free to contact us:

Belgium: 03 248 30 00 or info@aquaplan.com

The Netherlands: 0162 42 29 00 or verkoop-dhz@martensgroep.eu

Website: www.aquaplan.com

