

FLOOR PROTECT EXTREME

Waterproof, dirt-resistant and durable floor coating



PRODUCT DATA SHEET



Product description

A durable and water-repellent floor coating for protecting concrete floors against repeated stress, particularly from cars. It prevents wear and tear caused by hot tyres and protects the substrate against stains, grease and road salt.

Thanks to its special composition, **FLOOR PROTECT EXTREME** is water-repellent and easy to clean with ordinary detergents. The colour is concrete grey (RAL 7023).

Application

For use on porous concrete floors indoors and outdoors. It can be applied to cement floors, concrete (e.g. in garages or basements), on stairs or window sills.

Advantages

- › Easy to clean
- › Resistant to stains and grease
- › High resistance to repeated stress

How much product do I need?

Use approx. 0.1 litre/m² per coat.

See also the calculator on our website www.aquaplan.com.

Handy tips?

- Do not apply if the ambient or substrate temperature is below 10°C or above 30°C.
- Ecological formula: **FLOOR PROTECT EXTREME** does not contain any harmful solvents. By using this product, you are contributing to an eco-friendly environment.
- Clean your tools with water immediately after use.
- Wait 3 months before applying the coating to new concrete floors.

Material	Colour	Contents	Coverage	Drying time	Coats	Overpaintable
Acrylate co-polymer	Concrete grey	1 l / 4 l	5 m ² /l	About 24 hours	2	Yes

FLOOR PROTECT EXTREME

Waterproof, dirt-resistant and durable floor coating



INSTRUCTIONS



What do I need?




How do I prepare the surface?

- Make the substrate dust-free, grease-free and absorbent.
- First check that the floor is sufficiently porous. Apply a few drops of water to the floor. If the drops penetrate the floor, it is sufficiently porous. If they roll off the surface, the floor is not porous enough and is not suitable for this floor paint. Sand the floor with 80 grit sandpaper to remove any gloss, or clean the floor with hydrochloric acid and water (1 litre of hydrochloric acid to 4 litres of water). Rinse the surface. Allow to dry for 48 hours. Repeat the 'droplet test'. If necessary, repeat the treatment (1 l hydrochloric acid to 4 l of water).
- Remove any loose cement, paint residue, efflorescence and mould with a wire brush.
- Seal cracks and fissures with **BASEMENT PROTECT REGULAR PLUG**.
- Rinse the prepared surface with water and allow it to dry.

How do I use the product?

- Apply 2 coats of **FLOOR PROTECT EXTREME** with a brush or roller at a rate of approx. 0.1 litre/m² per coat.
- Dilute the first coat with 10% water to optimise adhesion.
- Apply a second, undiluted coat after the first coat has dried completely. This takes about 24 hours.
- We recommend waiting 3 days before using the treated area.

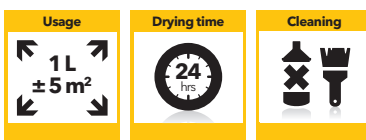

Would you like more information?

We are ready to answer all your questions.

Feel free to contact us:

Belgium: 03 248 30 00 or info@aquaplan.com

The Netherlands: 0162 42 29 00 or verkoop-dhz@martensgroep.eu

Website: www.aquaplan.com

